

10/511249

PT05 Rec'd PCT/PTO 12 OCT 2004

Please Note

“Date In” on Express Mail Mailing Label is October 12, 2004.

Therefore, application filing date is October 12, 2004.

Best Available Copy

4/PRTS  
10/511249  
DT05 Rec'd PCT/PTO 12 OCT 2004Express Mail Mailing Label  
No. ER 936794182 US

S 4808 WO

5

---

Conditional Access Network

---

The present invention relates to a method of operating a conditional access network wherein a provider distributes valuable contents over the network and end-users are allowed to access such valuable contents in function of individual access rights defined by a user license. The invention also relates to a conditional access component for use in a conditional access network wherein a provider distributes valuable contents over the network and end-users are allowed to access such valuable contents in function of individual access rights defined by a user license.

In a conventional network for the distribution of valuable contents such as Digital Video Broadcast "DVB", the end-user is provided with a conditional access unit that is either embedded in a Set-Top-Box or constitutes a pluggable module for insertion into a Common Interface ("CI") slot of a Set-Top-Box. In either case, the conditional access unit includes a SmartCard reader for accommodation of a subscriber card, i.e. a SmartCard (a Chip card) that contains required functionality and data to control secured access to the valuable contents in conjunction with the conditional access unit.

Due to general aspects of security, such as the level of protection against intrusion, and to technical requirements such as data formats, video resolution etc., content providers use different conditional access systems, and each conditional access system requires a specific conditional access component which the end-user must acquire to gain access to contents distributed with that particular conditional access system. A conditional access component includes both hardware and software, the software including a content provider's

- 2 -

application. At the time of manufacture, the application is loaded into the non-volatile memory of the component, and a license fee is usually paid by the manufacturer to the content provider. The purchase price for a particular conditional access component thus includes a license fee.

5       The present invention provides a new way to allow an end-user to gain access to valuable contents distributed in any of a plurality of conditional access systems with just one conditional access component that has a basic functionality common to all of the plurality of conditional access systems, and that can be selectively enabled for any of the plurality of conditional access systems subject to the  
10       successful acquisition of a license. Thus, the invention allows an end-user to be authorized in consuming services from several different CA systems with the same device (contrary to the current state of the art where the device is linked to the CA). This device is then able to host one or more CA applications and one or more related authorizations, at the same time.

15       According to the invention, a method of operating a conditional access network is provided. Providers distribute valuable contents over the network and end-users are allowed to access such valuable contents in function of individual access rights. The valuable contents are made available to the end-users by way of a plurality of different conditional access systems. End-users are provided with a  
20       generic conditional access component having a basic functionality common to all conditional access systems. Particular conditional access systems are loaded on the conditional access components. The particular conditional access systems thus loaded on the component are initially disabled. A license is acquired for a particular conditional access system and the conditional access system is enabled  
25       subject to a successful verification of the license.

      The invention also provides a conditional access component for use with the method. Specifically, the invention provides a conditional access component for use in a conditional access network wherein providers distribute valuable contents over the network and end-users are allowed to access such valuable contents in  
30       function of individual access rights. The component has a basic functionality

- 3 -

common to a plurality of different conditional access systems used in the network. For each particular conditional access system to be used in the component, specific application software is loaded into a non-volatile memory of the component. A new application thus loaded is initially disabled. The component  
5 includes a license verifier. When a valid license for a particular conditional access system is found, the corresponding application is enabled.

Further features and advantages of the invention will become apparent from the following description with reference to the drawings. In the drawings:

- Figure 1 is an overall view illustrating the relationship between an end-user  
10 side equipment, a number of conditional access application providers and a license provider;

- Figure 2 is a block diagram illustrating a head-end conditional access application enabler framework;

- Figure 3 is a block diagram of a conditional access component;

15 - Figure 4 is a flowchart illustrating essential steps of a procedure enabling the conditional access component to access contents received in a transport stream under a particular conditional access system.

20

**Glossary, definition of entities and data:**

25	AACC	Authorized Automatic CA Configuration
	ATR	Answer To Reset: data sent by a smart card when it is plugged in
	CAAP	(CA application Provider) the entity that permits the secure download of CAA to the SMC.
	CAA	(CA application: the code that runs within the SMC, giving access
30		to the related CAS services.

- 4 -

	CA_ID	Unique identifier of the CAS.
	CAS	(CA system) a system that enables an end-user to access to payTV programs
5	CAT	CA Table, that contains the CAS descriptors (parameters, data, scripts ...).
	End-user	The people that want to watch the tv and pay for that.
	Firmware	all kind of binary code stored in the SMC (e.g. boot, OS, applications, drivers, ...)
	Licence	This element allows the SMC to run legally the related CAA.
10	LO	(Licence Order) this procedure permits to an end-user to acquire from the LP the right to run a CAA, having then access to its payTV programs.
	LP	(Licence Provider) this entity
	LT	Licence Table, that contains the CA Licence descriptors
15		(parameters, data, scripts, ..).
	MMI	Man Machine Interface: a resource provided by the STB to the SMC to allow it to display data.
	Subscription	
	payTV programs	Programs scrambled under control of a specific CAS.
20	SC	(Service Channel) a channel that carries parameters (configuration file, data, scripts) related to each CAS
	Script	a sequence of commands that are executed by the SMC
	SerNo	Serial Number, unique value that identifies an entity (SmCa, SMC, ...)
25	SMC	Secure MultiCAS Component: It is made of one or more devices; is a secure one, able to store, run and/or handle applications & data in a secure way: it means that any element within is protected against modification and illegal access.
	SmCa	Smart Card
30	SMC keys	secret and/or public data used for security-orineted services (e.g. integrity, authentication, confidentiality)
	TS	Transport Stream

- 5 -

TiSe (Timing Service) a service that provides right date and time, available either outside or inside the SMC (e.g. a clock).

5 **Sequence of operations:**

1 the end-user buys the component (SMC)

2, in parallel:

2 he retrieves the CA Application that will run on the device

2' he acquires the authorization to use such application

10 3 he consumes the CA services

The steps 2 and 2' could be made in any order.

**Description of the different actions to be considered :**

## 1. SMC purchasing

The end-user buys a SMC.

- 5 This device does contain at least boot firmware, able to manage security, handle smart cards, perform secure download, process licences. The SMC could also embed some other applications such as CAA (one or more). In term of data, it could embed one or more licences for one or many CAS.

## 10 2. CAA Acquisition

In this part, we develop the process used for acquiring the CA Application and the parameters needed to configure the CAS and the SMC.

- 15 Conditional Access Application means the firmware needed to process the encrypted A/V data using the different keys and licence in order to deliver a clear content to the end-user according to its rights.

Three steps must be passed to get a CAA "pending" ready to be activated inside the SMC : CAA identification, CAA configuration and CAA acquisition.

20

## CAS identification

1. The SMC retrieves CASs descriptors by listening the CAT on the SC (which is always available to the SMC).
- 25 2. identification is triggered by an event:
  - it could be a manual event (through MMI):The user can access a menu proposing CASs available for the end-user.
  - it could be one of the following four events:
    - SmCa insertion : If the user inserts a SmCa into the SMC,  
30 then a process of automatic CAS identification is launched.

- 7 -

- Module insertion or Module menu : the Module firmware can propose a set of CAAs that are identified as present and in the Service Channel, through the CAT.
- 5       • Content triggering, downstream event : If the channel selected by the user is protected by a CAS requiring a specific CAA not present as valid in the SMC, and if the considered CAA is conform to the AACC, then a new CAS is automatically identified.
- 10       • License presence (means step 2' has been already performed): If the license corresponding to a CAA is present and valid in the SMC, then the corresponding CAA is identified as required by the CAS to go on configuration phase.

At this step, the CAS has been choosen.

- 15       3. The SMC checks the presence of the corresponding CAA inside it.
4. If the considered CAA is present and conform to the latest version (using information coming from the CAT), then the CAA acquisition is considered as achieved.
5. If the considered CAA is not present or in an older version, then the
- 20       CAS identification is complete.

At the end of the CAS identification, the SMC knows CA\_ID and may have CAA.

#### CAA Configuration

- 25       Once identified, the CAA needs a lot of dynamic parameters to be set. The fact that different CASs can be loaded inside the SMC, added to a need of adaptation skill to prevent obsolescence of the architecture implies that the CAA could come with its parameters through a dedicated specific Service Channel.
- 30       The Service Channel can be a database carried by the downstream, and containing the following parameters that will allow



- 8 -

- the CAS to be configured and downloaded using for example a script.
- and the SMC itself to be configured to integrate the new CAA.

Some of the parameters can be used by both the CA and the SMC, and can be :

- 5           • the ATR of the SmCa in order to identify it
- The SerNo corresponding to the Smart Card or to the CA to be downloaded (including e.g. mask features for zoning)
- The script describing the method to be used to download the CAA firmware (location of data, files locations and their signature ...
- 10          • A reference to the license needed to unlock the CA.

At the end of the CAA configuration, the SMC knows **CA\_ID** and how and where it can get the latest version of the CAA.

15

#### CAA acquisition

Once identified and configured, the CAA must be acquired by the SMC (e.g. by a download). At the end of this process, the CAA will be fully available to the system, but will remain locked until all the rights (especially

20       the license) have been checked successfully.

The CAA acquisition can be proceeded as following :

- 25       1. The CAA can be already present in the SMC , whether because the system was sold with this CAA inside, or because this CAA was already acquired (pre-stored) in the system in a previous session. Then, its integrity and validity must be checked, and the acquisition is considered as ended.
- 30       2. The script contained in the Service channel can be ran in order to download the CAA over the air, setting the tuner on the appropriate transponder and channel, and filtering the downstream in order to collect the correct files.

- 9 -

At the end of the CAA acquisition, the SMC has the latest version of the CAA relative to the CA\_ID. The CAA is in a locked state until the license and required rights have been checked as valid and up-to-date.

5    2'. Licence acquisition

2'0. Description of the licensing system

The CAA enabler Head End (owned by the LP) is :

- a CAA EMM builder,
- 10    - an encryption unit (ENC) and
- a database to store information like SMC identifier(SMC id), SMC addresses and SMC keys in a secure manner.

This Head End component will generate CAA EMMs (used for Licence transport) in MPEG packet format and sends these to the connected  
15    multiplex (MUX) that receives also Video/Audio data, standard EMM and ECM, Service Information (SI) and Program Service Information (PSI). In addition it transmits the CAA EMM Packet Identifier (PID) and the CA\_SYS\_ID to the SI/PSI generator.

The task of the SI/PSI generator is to modify the Conditional Access  
20    Table(CAT), i.e. to add a ca\_descriptor() containing the CAA EMM PID and the CA\_SYS\_ID. The purpose is to signal the CAS where it will find the CAA EMM stream. The mechanism is identical to the one used for the EMM play out.

25    On the receiver side, in the SMC, the CAA enabler consists of three components:

- the CAA EMM filter,
- the verifier (a part of the firmware that is able to check EMM validity) and
- a secure storage to store SMC SerNo, SMC addresses, SMC keys and  
30    control data. This storage area is protected against unauthorized access and modification.

- 10 -

The CAA EMM filter extracts the CAT from the encrypted transport stream TS\* and analyses it to get the PID where the CAA EMM stream is played out. The next task is to interpret the CAT to find the CAA EMM which is addressed to the specific module. If one is found the filter unit sends the

5 CAA EMM to the verifier.

The verifier uses a SMC key to proof the authenticity of the EMM (e.g. by using digital signature feature) and in the case of a successful verification, it decrypts the CAA EMM. The next step is to process the instructions of the CAA EMM payload. In the case of an activation the SMC enables e.g. the

10 de-scrambler to produce the clear stream TS.

#### 2'.1 Licence Identification:

The end-user selects manually or automatically, thru the SMC, the CAS he wants to acquire. It leads for the SMC to the knowledge of the CA\_ID.

15 It could be done in different manners:

2'.1.a insertion of the SMC, or service selection: it then triggers a select feature, thru an MMI, (e.g. using a menu and the remote control).

2'.1.b insertion of the CA smart card: it then identifies the CA\_ID, as it is embedded in the smart card. This value is sent to the SMC.

20 2'.1.c content triggering: by choosing himself a channel or a service, the end-user selects and identifies the CAS.

At the end of this point, the SMC knows the CA\_ID

#### 2'.2 Licence Configuration

25 The SMC retrieves all parameters (e.g. fees, phone number, SerNo, licence options) associated to the CA\_ID, required for Licence access, in order to perform the retrieval of the CA-licence. This information can be taken in the Service Channel (from the LT) or in a fixed database stored in the SMC.

At the end of this point, the SMC knows **where and how access to the CA**

30 **licence(s).**

#### 2'.3 Licence Acquisition:

If a return channel exists,

- 11 -

- the end-user processes a request to the LP for the CA-licence, to do that, the end-user, using config parameters, requests for a licence from the LP (e.g. financial transaction), bringing in the sent data everything requested by the LP (e.g. SMC SerNo, identity, ...).
- 5       - the LP sends the specific licence, after complete payment, the LP processes data specific to the end user SMC and the chosen CAA, and sends them to the SMC (e.g. EMM).

If no return channel exists

- the end user buys a prepaid card, embedding a CA-licence
- 10       - the licence is downloaded in the SMC, made specific (i.e. the licence is linked to the SMC SerNo).
- Later, when rights are used, the credits in the card are burned.

At the end of this point, the SMC has a **licence of use for a specific CAS.**

15

### 3. Consumption of PayTV programs

The end-user wants to consume programs or services. The CAA enabler feature requires some additional hardware resources on the head end component and on the SMC component. This is described in 2'0.

20

Here is the sequence :

- 3.1 the end user selects a channel or a service he wants to consume
- 3.2 the SMC checks the corresponding CAA (i.e. CAA(CA\_ID(channel)):
  - 25       (optional) checks presence of the smart card related to the CA
  - checks that the CAA is not corrupted and locked
- 3.3 the SMC checks the CA licence:
  - checks the licence presence
  - checks the licence parameters are OK (date-by using the TiSe-, identity,
  - 30   SerNo, ..).
- 3.4 the SMC runs the CAA.

## Claims

1. A method of operating a conditional access network wherein providers distribute valuable contents over the network and end-users are allowed to access  
5 such valuable contents in function of individual access rights, characterized in that the valuable contents are made available to the end-users by way of a plurality of different conditional access systems, end-users are provided with a generic conditional access component having a basic functionality common to all conditional access systems, particular conditional access systems are loaded on  
10 the conditional access components, the particular conditional access systems thus loaded on the component are initially disabled, a license is acquired for a particular conditional access system and the conditional access system is enabled subject to a successful verification of the license.

2. The method of claim 1, wherein the valuable contents are distributed in a  
15 digital transport stream that contains Entitlement Management Messages "EMMs" specific to each conditional access system.

3. The method of claim 2, wherein each conditional access component includes a filter unit for filtering out the specific EMMs of conditional access systems enabled on the component and a verifier unit for the verification of access  
20 rights defined by the filtered specific EMMs.

4. The method of claim 3, wherein the valuable contents in the transport stream are scrambled, each conditional access component has a descrambler adapted to process a scrambled transport stream into a clear transport stream, and the descrambler is enabled or disabled in function of a successful or unsuccessful  
25 verification, respectively, of the access rights.

5. The method of any of claims 1 to 4, wherein each conditional access system has an associated application for execution by the conditional access component.

- 13 -

6. The method of claim 5, wherein applications are downloaded over the network from a conditional access application provider.

7. The method of any of claims 1 to 6, wherein the network includes service channels for the transmission of configuration data to the conditional access components.

8. A conditional access component for use in a conditional access network, wherein a provider distributes valuable contents over the network and end-users are allowed to access such valuable contents in function of individual access rights defined by a user license, characterized by a basic functionality common to a plurality of different conditional access systems used in the network, a non-volatile memory for storing specific application software that constitutes a particular conditional access system in conjunction with the basic functionality, the particular conditional access system being initially disabled when the specific application is loaded in the non-volatile memory, means for acquiring a license for the particular conditional access system, and means for selectively enabling the particular conditional access system subject to a successful verification of a corresponding license.

9. The conditional access component of claim 8, comprising a memory for storing at least one conditional access application associated with a particular conditional access system and means for loading said application into said memory.

10. The conditional access component of claim 8 or claim 9, the valuable contents being distributed in a digital transport stream that contains Entitlement Management Messages "EMMs" specific to each conditional access system, and comprising a filter unit for filtering out specific EMMs of conditional access systems enabled on the component and a verifier unit for the verification of access rights defined by the filtered specific EMMs.

- 14 -

**Abstract**


In a conditional access network a provider distributes valuable contents such as digital TV over the network and end-users are allowed to access such valuable contents in function of individual access rights defined by a user license. The

5 valuable contents are made available to the end-users by way of a plurality of different conditional access systems, each end-user is provided with a generic conditional access component having a basic functionality common to all conditional access systems, and particular conditional access systems are selectively enabled on each conditional access component subject to a successful

10 verification of a corresponding license.

1/4

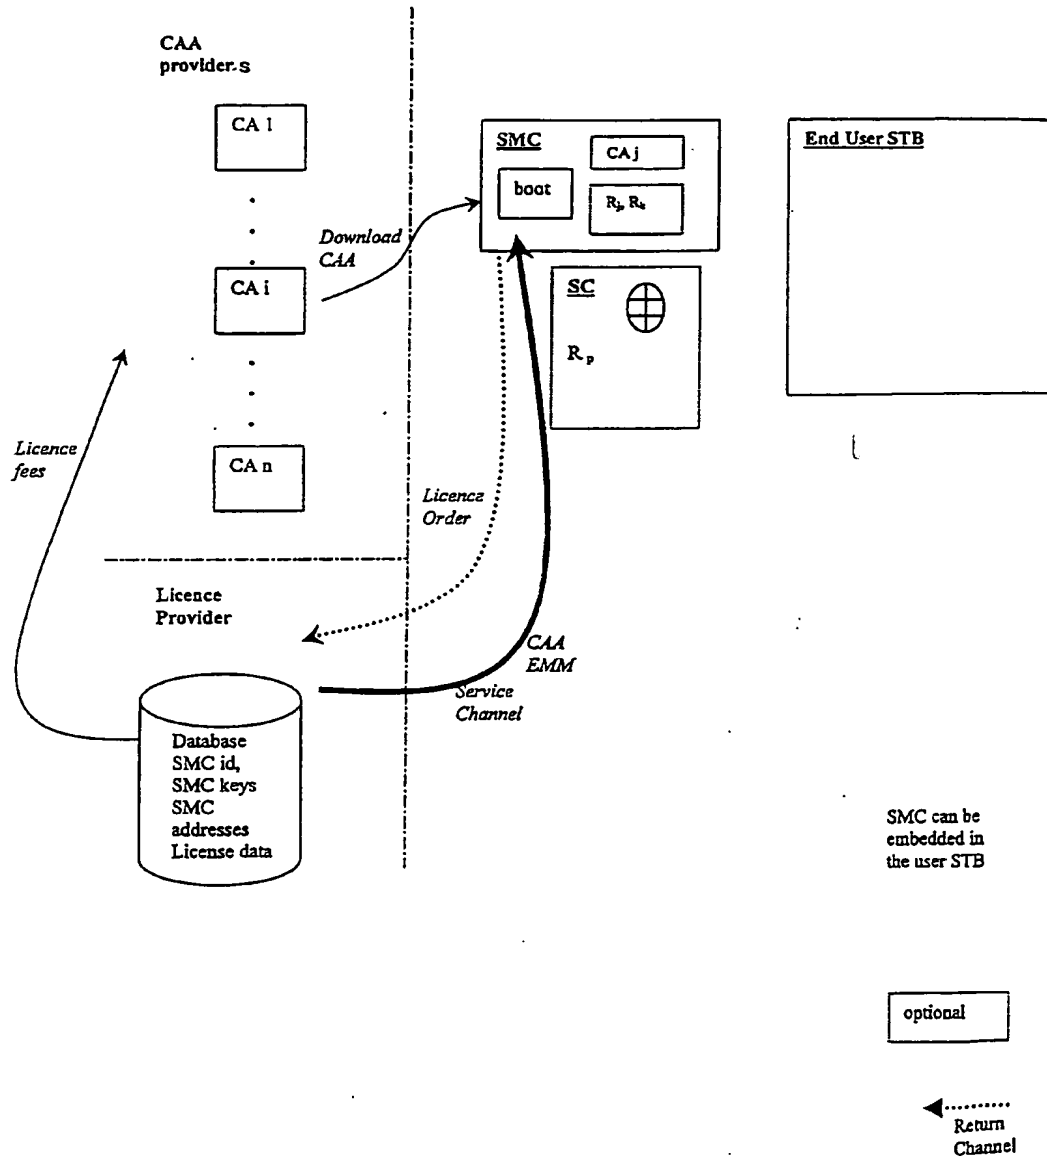Fig.1





2/4

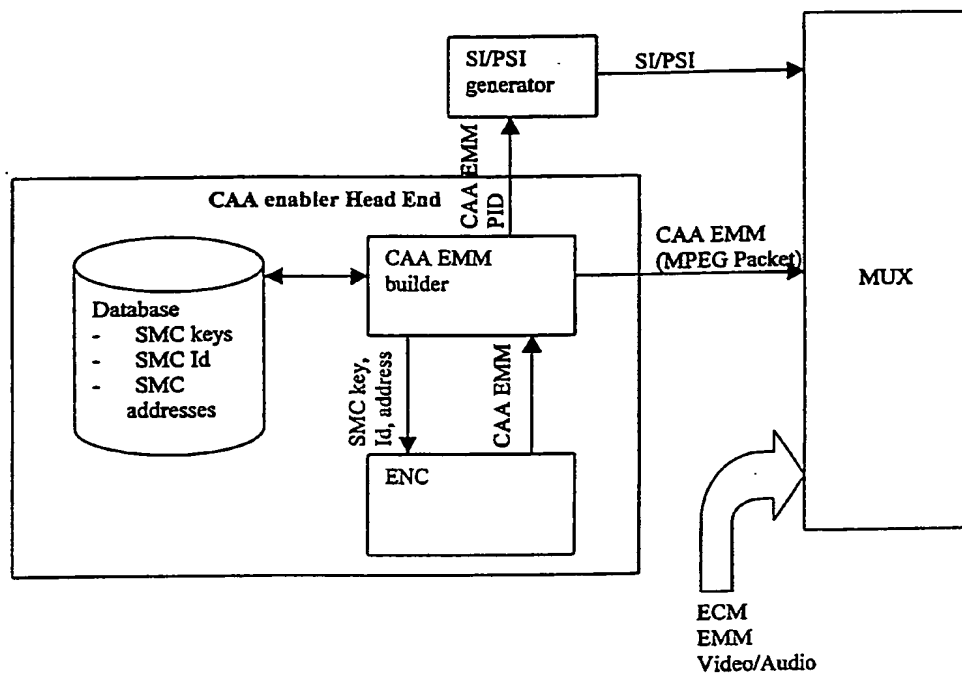
Fig. 2


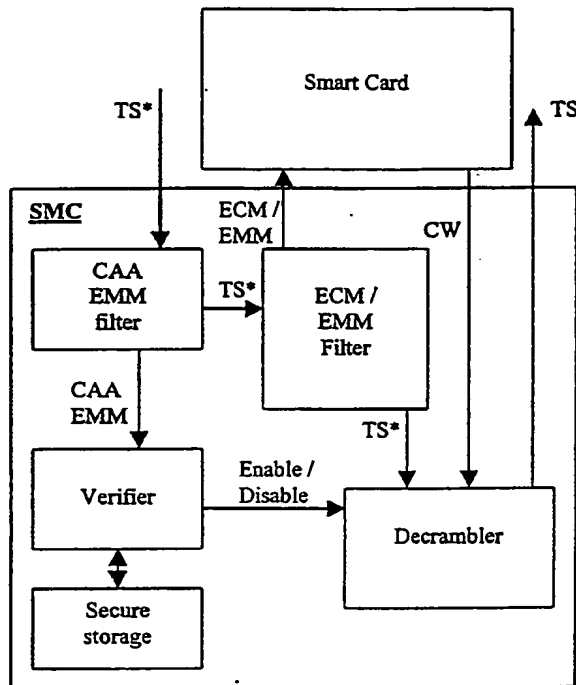
Fig. 3

Fig. 4

Flow chart of CAA enabler on the SMC side

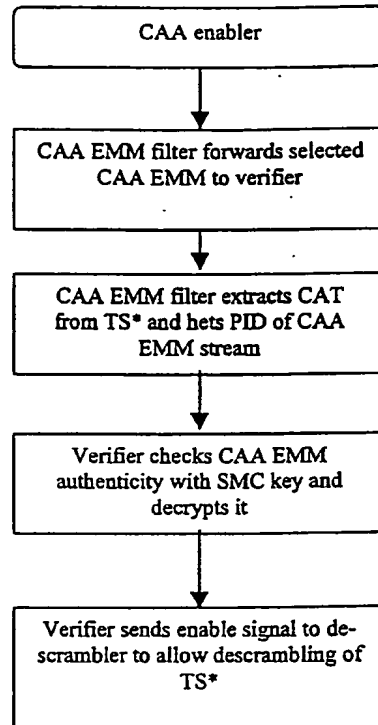

4

	jj		hhh						3333
			hh						33 33
aaaa	jj	oooo	hh hh	nnnnn	sssss	oooo	nnnnn		33
aa	jj	oo oo	hhh hh	nn nn	ss	oo oo	nn nn		333
aaaaa	jj	oo oo	hh hh	nn nn	ssss	oo oo	nn nn		33
aa aa	jj jj	oo oo	hh hh	nn nn	ss	oo oo	nn nn	33 33	
aaa aa	jj jj	oooo	hhh hh	nn nn	sssss	oooo	nn nn	3333	
	jjjj								

9999	2222	11
99 99	22 22	111
99 99	22	11
99999	222	11
99	22	11
99	22 22	11
999	222222	111111

3/15/05

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**